


# Order form - Insulated Side Hinged Garage Door GSW 40-L

Date:	Customer Order Number:	Number of Sheets:
-------	------------------------	-------------------

Customer Name:	Contact Number:
----------------	-----------------

Deliver To:	Invoice To:
-------------	-------------

**Handing always viewed from outside the garage**

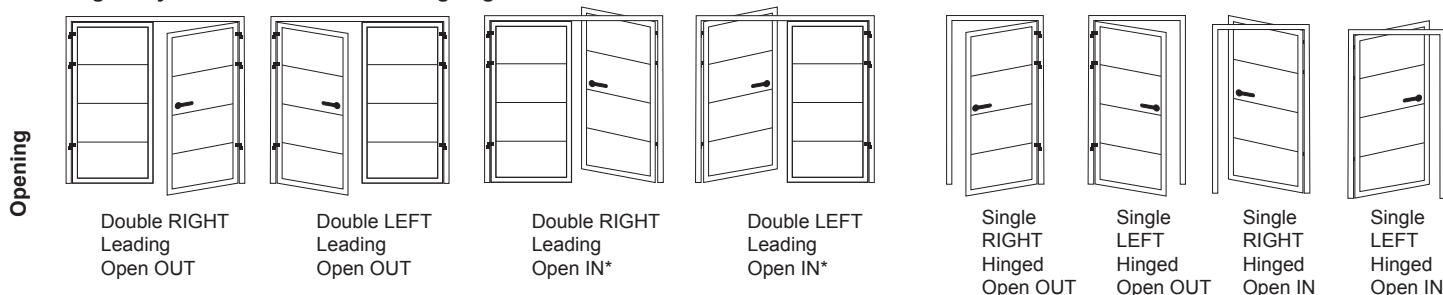

\*Open-in increases the likelihood of water ingress. We recommend the drip guard option with open-in doors.

**NOTE: Order by over frame dimensions.**  
To calculate the over frame size, deduct 20mm from the width and 10mm from the height of the structural opening size to allow for coursing tolerance.

Over Frame Width:	Over Frame Height:	Quantity:
-------------------	--------------------	-----------

<b>Panel, Frame &amp; Hinges</b>	Door Style:	Georgian	Standard Rib	Centre Ribbed	Solid	Traditional:	Standard Rib	Centre Ribbed	Solid	
	Panel Surface: (Inside Stucco)	Woodgrain	Stucco	Smooth	Micro-Profiled					
	Panel Colour: (RAL 9002 Inside)	RAL 9016	Trend/+ Colour:				RAL Colour:			
	Wood Design: (RAL 9002 Inside)	Golden Oak	Rosewood	Night Oak	Winchester					
	Frame Colour:	Trend/+ Colour:				RAL Colour:				
	Hinges:	Concealed hinges are standard. Surface mounted hinges are available as an option:				Surface mounted hinges (colour options below)				
	Complete Surface Mounted Hinge Colour:	Trend/+ Colour:				RAL Colour:				
Half & Half Surface Mounted Hinge Colour:	(Example, white frame & black door leaf - Hinges will be half white and half black to match frame and panel colour.)									

<small>Orientation</small> Panel orientation for Georgian, Standard Rib, Centre Rib, Solid or Traditional Style:	Horizontal	Vertical	<b>Split</b>	Leaf split: 1/2 - 1/2	Asymmetric
------------------------------------------------------------------------------------------------------------------	------------	----------	--------------	-----------------------	------------

<b>Polymer Glazing</b>	Type Rectangle 1	610 x 270		<b>Teckentrup Bling Glazing</b> Type Aluminium Alpha 280 x 280 Type Aluminium Sigma 610 x 200 Type Aluminium Zeta Ø 280 Type Aluminium Gamma 534 x 344 Type Aluminium Kappa 1860 x 180 Type Aluminium Athena 406 x 203 Type Aluminium Versus Glazing Polymer: Clear Satin	Quantity: Please describe the position of the <b>windows</b> and/or <b>decals</b> required. Eg, top panel evenly spread or vertically aligned on the left or vertically aligned on the right.
	Type Cross Mullion 1	610 x 270			
	Type Rhombus 1	610 x 270			
	Type Rectangular 2	680 x 210			
	Type Rectangular 3	980 X 140			
	Type Square 1 Polymer	270 x 270			
	Type Square 2 Polymer	270 x 270			
	Type A (Clear glazing only) Leading Colour:	680 x 370			
	GSA Aluminium Window Section Style:	Leading Colour:			

Glazing Polymer:	Clear	Frosted	Satin	Window Orientation:	Horizontal	Vertical
Frame Colour: Trend/+:	RAL:					

<b>Decals</b>	Type Access 1	431 x 40		Type Writing 1	100 2	
	Type Access 2	430 x 40		Type Writing 2	200 2	
	Type Access 3	215 x 40		House No. Required:		
	Type Access 4	400 x 86		<b>Notes</b>		
	Type Access 5	180 x 180				
	Type Access 6	70 x 70				
	Type Access 7	150 x 150				
	Type Access 8	194 x 194				
	Type Access 9	436 x 40				
	Type Access 10	431 x 13				

<b>Accessories</b>	Aluminium Strip Threshold (in place of standard lipped 3-part threshold)	2-Part Strip Threshold (centre & back part in place of standard lipped 3-part threshold)
	3-Point Locking with CarTeck Lever Handle (Active leaf) Handle Finish (Satin Nickel as Standard):	
	Stainless D Handle Ø 38 x 1200mm Qty:	Stainless D Handle Ø 38 x 1500mm Qty:
	D Handle 3-Point Locking	
	Black Powder Coated Lever Handle (Supplied in place of Stainless Steel) Lever Handle Upgrade 316 Stainless Steel (Recommended for high salinity environments)	
	Drip Guard (Recommended on inward opening doors)	
	Foot Stops (Supplied in place of door stays)	
	Additional Keys Qty:	Finger Pull
	Letter Box	Code Lock
	Spy Hole	Smart Lock

**TOTAL £**

SEND FORM	SAVE FORM	RESET FORM
-----------	-----------	------------